

MBA

SUBMERSIBLE SEWAGE PUMP


Italian dual mechanical seal, with thermal protection device, well designed stainless steel casing for higher quality & longer life time.

FEATURES

- Best structure design
- Dry motor
- Double mechanical seals
- Equipped with Auto-Cut protector
- Pump casting
- Out cover adopt stainless steel material
- Acid resisting silicon carbide seals.
- This series is suitable for all light acid, corrosive.

APPLICATIONS

- Water drainage for industries.
- Sanitary sewer - single and multifamilies drainage.
- Water drainage for chemical, pharmaceutical and metal processing factory.
- Emergency flood water drainage.

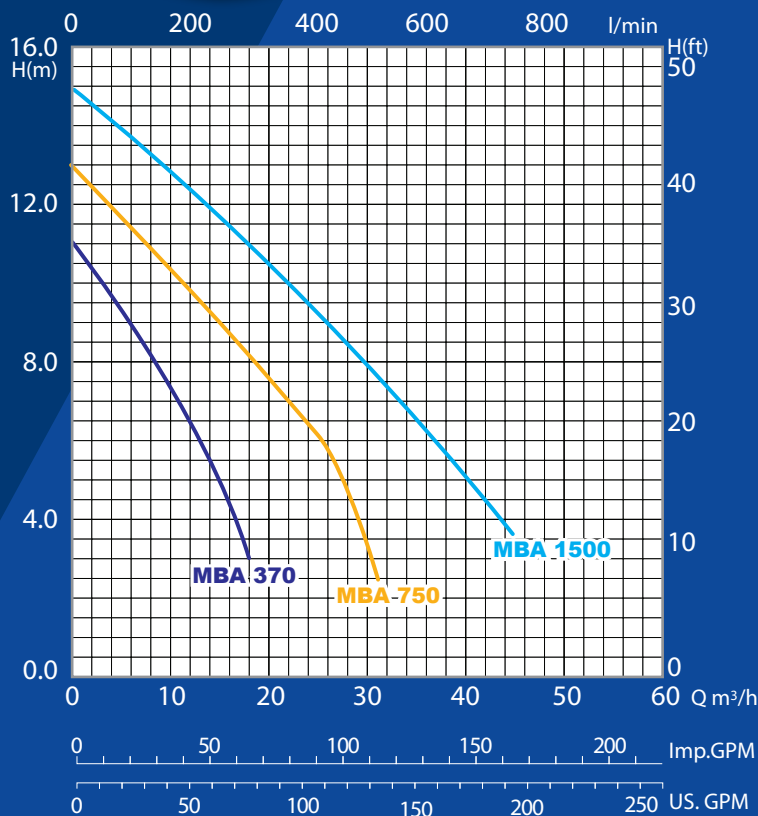

PERFORMANCE TABLE

Model	Outlet (mm)	Motor Power (Kw)	Max Head (m)	Max Flow (m³/h)	Impeller Passage (mm)	Voltage
MBA 370 / MBA 370A	50	0.37	11	18	50	240V
MBA 750 / MBA 750A	50	0.75	13	31	50	240V
MBA1500 / MBA 1500A	80	1.5	15	45	50	240V

Model with "A" = Auto, with Float Switch