

Tsunami Pump[®]



your preferred **water booster**




SWIMMING POOL & JACUZZI series



SWIMMING POOL PUMP WITH FILTER SET BASED ON SWIMMING POOL SIZE

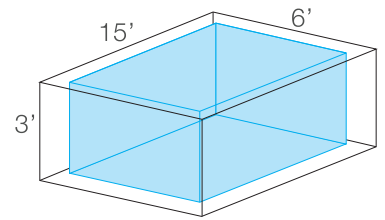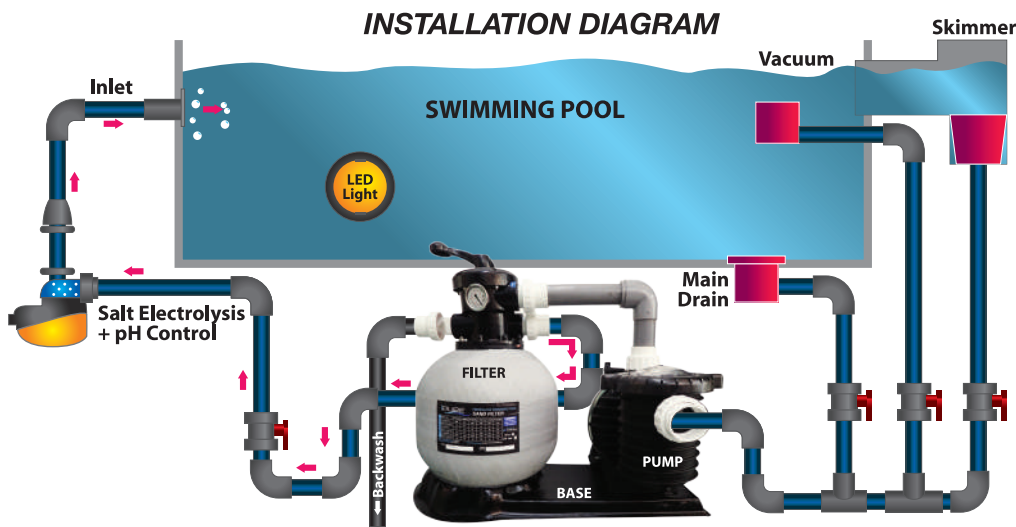

RECOMMENDED SPEC. BASED ON POOL SIZE
SCPB100 + IP-TM400+ BASE

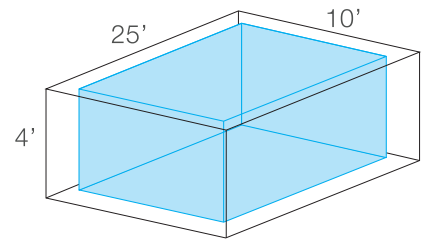

RECOMMENDED SPEC. BASED ON POOL SIZE
SCPB200 + IP-TM525 + BASE

PERFORMANCE TABLE

Model	Max Flow (m ³ /h)	Valve Connection (mm)	Sand (KG)
SCPB100 + iP-TM400+ Base	8	40	35
SCPB200 + iP-TM525 + Base	12	40	65

SCPB

SWIMMING POOL SELF-PRIMING PUMP

SPECIFICATION

- High performance and super pressure.
- 2" inlet and outlet for higher performance and lower noise.
- IP65 Air cool motor design of moisture proof and low temperature rising.
- Capacitor running type for energy-saving.
- Thermal overload protector ensures the motor safety and prolongs the motor's service life.

APPLICATION

- Perfect for SPA system and swimming pool filtration.
- Water circulation and filtration for marine aquaculture and ornamental fish pond.



PERFORMANCE TABLE

	Model	Horsepower (HP)	Voltage (v)	Inlet (in)	Outlet (in)	Q.max(L/min)	H.max (m)	Filter Basket (liter)	Length
	SCPB100	1.0	240	2	2	360	11	2	635
	SCPB200	2.0	240	2	2	465	17	2	635
	SCPB300	3.0	240	2	2	550	22	2	660
3 Phase	SCPB100T	1.0	415	2	2	360	11	2	635
	SCPB200T	2.0	415	2	2	465	17	2	635
	SCPB300T	3.0	415	2	2	550	22	2	660

JAC

HYDROMASSAGE BATHTUB PUMP

SPECIFICATION

- Dual speed bathtub & jacuzzi pump.
- High-speed for massage function; low speed for filter and cycle functions.
- High-performance volute design.
- Large flow and low-noise.
- 2" inlet and outlet.
- Flexible housing for easy installation.
- High reinforce engineering cover.

FEATURES

- Corrosion protected shell to prevent water directly contacting with motor.
- Run dry protection.
- Pump body and impeller in highly reinforced engineering grade plastic, motor shaft stainless steel, aluminium motor housing.
- IPX5 protection.
- Thermal overload protection.
- Insulation class F.
- CE Authentication.
- Mechanical seal is ceramic stealite/ metalized carbon.
- Rated for continuous use.
- Very quiet operation.

APPLICATION

- Water circulation for SPA system
- Hydromassage bathtub or jacuzzi



PERFORMANCE TABLE

Model	Qmax (l/min)	Hmax (m)	V/Hz	Power		Amps	Fitting Size (mm)	Weight (kg)
				kW	HP			
JAC100	290	11	220-240/50	0.75	1.0	3.8	3.8	9.0
JAC150	380	14		1.1	1.5	5.8	5.8	10.5

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

www.tsunamipump.com



ISO 9001



TUV
PRODUCT SERVICE
CERTIFIED
GERMANY

