




JLM INTELLIGENT AUTOMATIC SELF-PRIMING JET PUMP



JLM-C400A

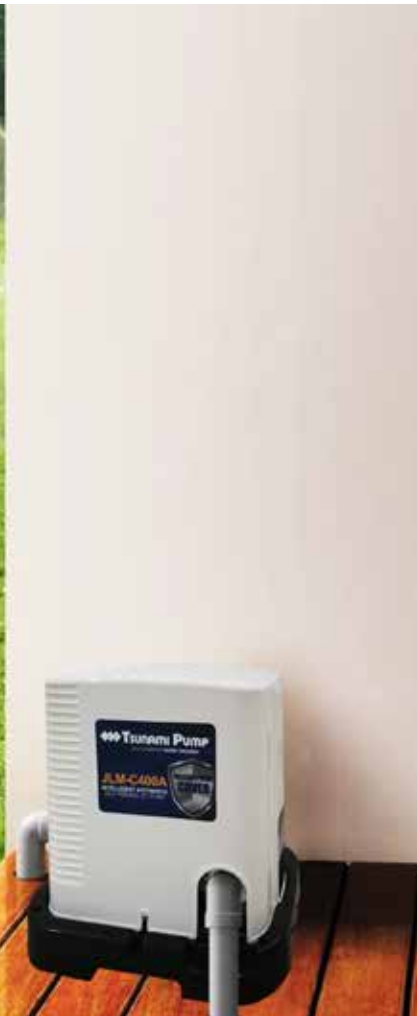

JLM-200A



LOW MAINTENANCE



ENERGY SAVING



STRONG & DURABLE



OVER HEATING PROTECTION



LOW NOISE OPERATION



ANTI-RUST PUMP SHELL

JLM | INTELLIGENT AUTOMATIC SELF-PRIMING JET PUMP

- Automatic cold & hot water turbine self-priming pump.
- Widely used in living water taking, pumping well water, tap water and 100°C hot water, household boosting, garden & farm irrigations, etc.
- Suitable for non-flammable or non-explosive clear water without abrasive (PH 6-8.5) or fiber and not aggressive to stainless steel.
- High-Tech Intelligence Automatic Control System, PCB dry operation protection, water lacking protection, electronic pump starting delay protection, and more protection system of 5 Auto Restart Timer Mode.

FEATURES



MULTIPLE PROTECTION



ENERGY SAVING



ANTI DRY RUN PROTECTION



5 AUTO RESTART TIMER MODE
1H / 2H / 5H / 12H / 24H

WEATHERPROOF COVER*

- All-rounder cover for outdoor installation to protect pump from all weather.

*JLM-C400A only



STAINLESS STEEL INLET & OUTLET


- Anti-rust inlet & outlet to protect connectors from rust and corrosion.



SOUNDPROOF BASE

- To provide extra low noise during operation and stable position at all time.

TECHNICAL & PERFORMANCE DATA

Model	Power (W)	Horse Power (HP)	Voltage/ Frequency	Current (A)	Max Flow (l/h)	Max Head (m)	Suction (m)	Speed (r/min)	Inlet & Outlet (in)	Support Up To
JLM-200A	200	0.3	240V/50Hz	2.0	2,000	25	8	2,860	1"x1"	1~2 storey
JLM-400A	400	0.5		2.7	2,000	35	8	2,860	1"x1"	2~3 storey
JLM-800A	800	1.1		5.2	3,500	45	8	2,860	1"x1"	3~5 storey
JLM-1500A	1500	2.0	415V/50Hz	8.0	6,500	60	8	2,860	1.5"x1.5"	5~8 storey
JLM-C400A	400	0.5	240V/50Hz	2.7	2,500	35	8	2,860	1"x1"	2~3 storey

A Pump Cover or Shelter is required for Outdoor Installation except JLM-C400A 

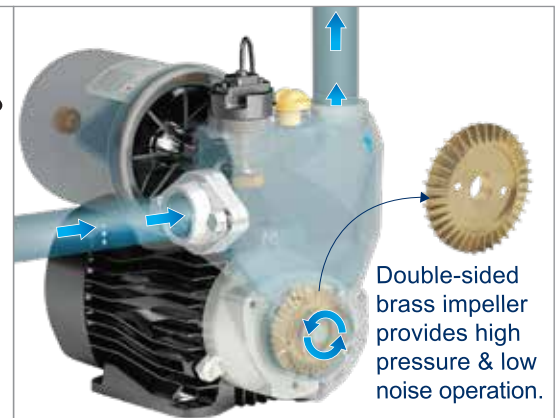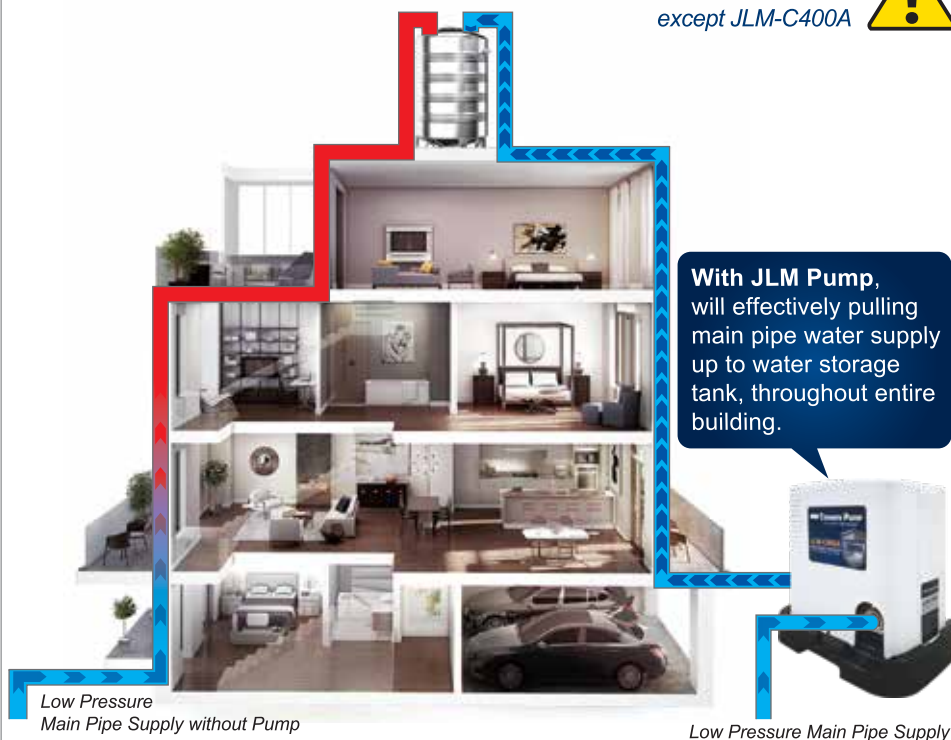

The pressure tank achieving a buffering effect and prevent water hammering in the pipework.

