

# MBF

## THREE-PHASE SUBMERSIBLE SEWAGE PUMP

### ■ Extra Power

#### FEATURES


- Non-clog impeller and diffuser, good performance for muddy waste water.
- Italian double face mechanical seal, AC over-heat protector inside.
- Special anti-mist design for the plug, good waterproof.
- AISI304 motor shell, shaft and nuts.
- Good appearance, light & compact, easy to use and maintain.

#### APPLICATIONS

- For building basement, farming field, food factory, and industrial waste water drainage.
- For dirty and waste water drainage in sewage plants.

#### THREE-CHANNEL ENSHROUDED NON-CLOG IMPELLER

high discharge capacity, suitable for muddy sewage with big solid.

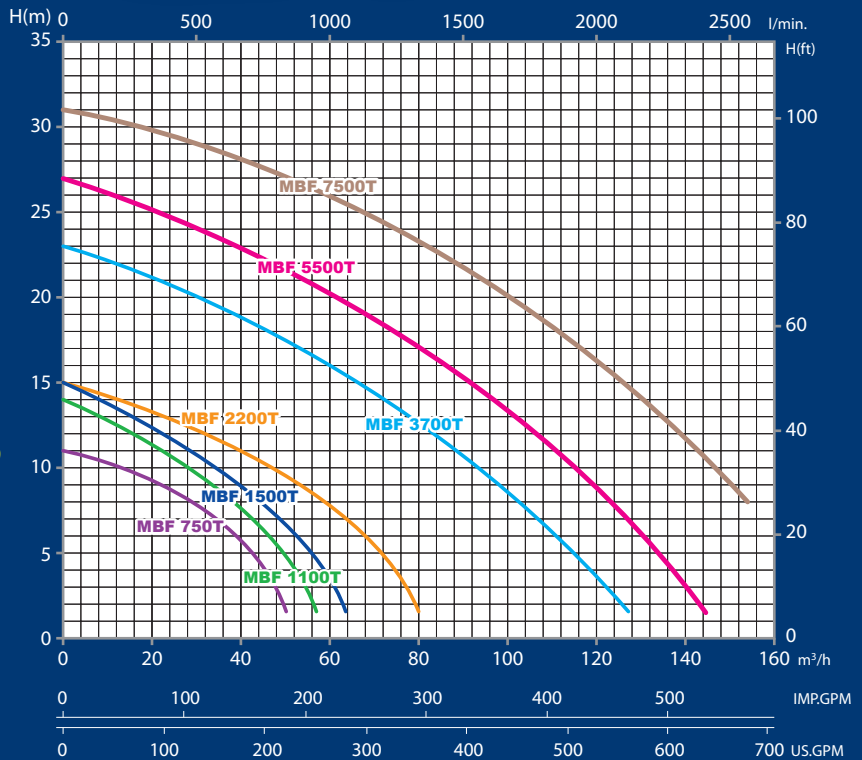

#### PERFORMANCE TABLE

Model (50Hz)	Outlet (mm)	Motor Power		Max Head (m)	Max Flow (m³/h)	Rotation (rpm)	Voltage
		Kw	HP				
MBF 750T	50	0.75	1	10.5	50	2850	415V
MBF 1100T	50	1.1	1.5	13.6	56	2850	415V
MBF 1500T	80	1.5	2	15	64	2850	415V
MBF 2200T	80	2.2	3	15	80	2850	415V
MBF 3700T	100	3.7	5	20	128	2850	415V
MBF 5500T	100	5.5	7.5	27	144	2850	415V
MBF 7500T	100	7.5	10	32	156	2850	415V

\*T = Three-phase